


Features

- : 850nm wavelength range
- : Narrow beam angle
- : High output power
- : Cost effective.
- : Other configurations available on request

Applications

- : Position Sensing
- : Encoder


Description

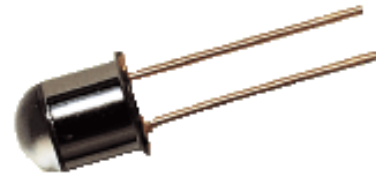

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to 100 °C
Operating Temperature	0 to 85 °C
Lead Solder Temperature	260 °C, 10 sec
Continuous Forward Current	12mA
Continuous Reverse Voltage	5V (@10µA)

Dimensions


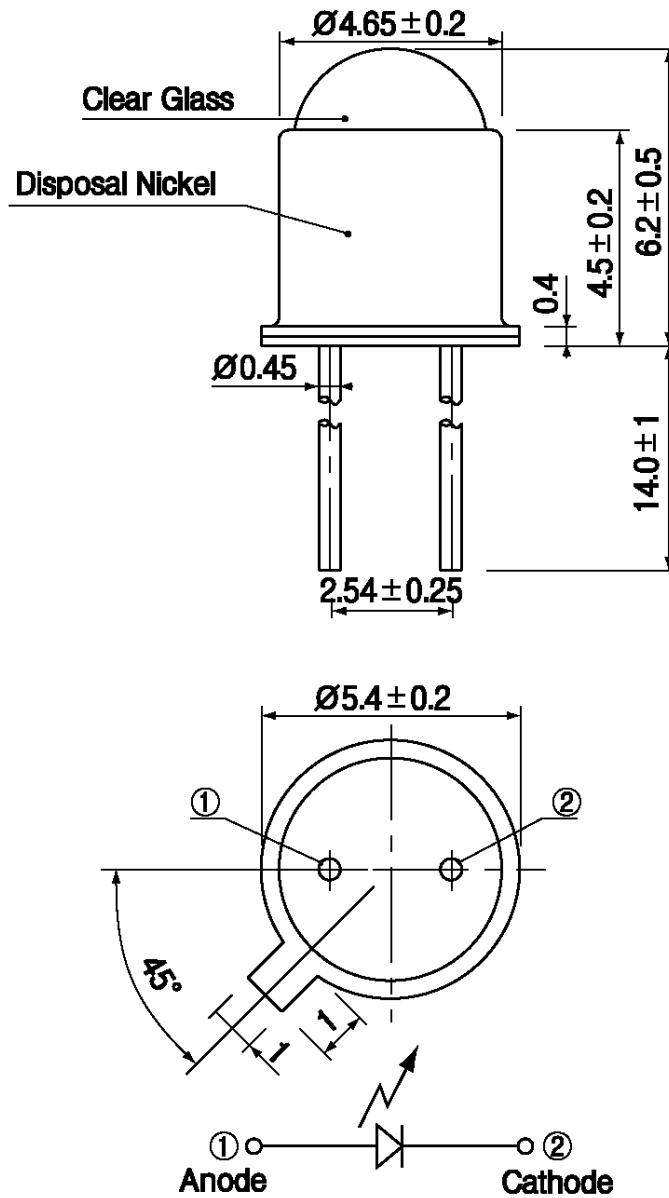


Electro-Optics Characteristics (T_a=25°C unless otherwise stated)

Parameters	Symbol	Specified			Unit	Test Conditions
		Min.	Typ.	Max.		
Threshold Current	I _{th}		1.5	3	mA	CW
I _{th} Temperature Variation	ΔI _{th}		1.0		mA	T _a =0 to 85 °C
Slope Efficiency	η	0.3	0.4	0.7	W/A	I _f = 6mA
η Temperature Variation	Δη / ΔT		-0.5		%/ °C	T _a =0 to 85 °C at 6mA
Optical Output Power	P _o		2		mW	I _f = 6mA
Peak Wavelength	λ	840	850	860	nm	I _f = 6mA
λ Temperature Variation	Δλ / ΔT		0.06			T _a =0 to 85 °C at 6mA
Spectral Bandwidth (RMS)	Δλ			0.85	nm	I _f = 6mA
Beam Divergence	Θ		2		°	P ₀ =2.0mW, (FWHM)
Operating Voltage	V _f		1.8	2.2	V	I _f = 6mA
Breakdown Voltage	V _b		-10		V	
Dynamic Resistance	R _d	20	35	55	Ohm	I _f = 6mA

Notes

* These specifications are subject to change without notice.


NOTICE


The inherent design of this component causes it to be sensitive to electrostatic discharge(ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

DANGER


The VCSEL is a class IIIb laser and should be treated as a potential eye hazard. Due to the size of the component, the applicable warning logotype, aperture label, and certification / identification label cannot be placed on the component itself.

Characteristics Curves


LIV Curve

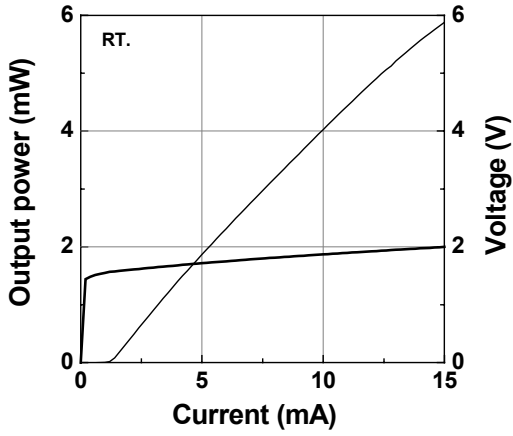

LIV vs Temperature

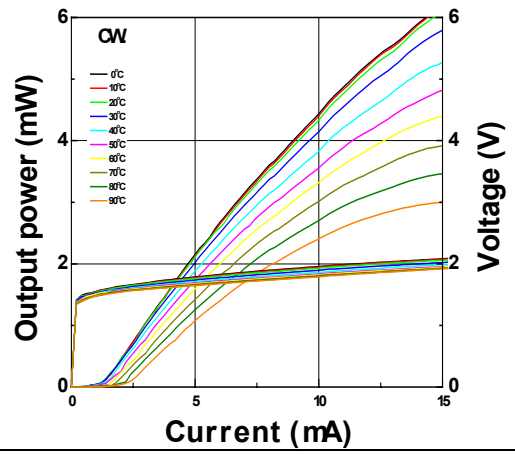

EL Spectrum

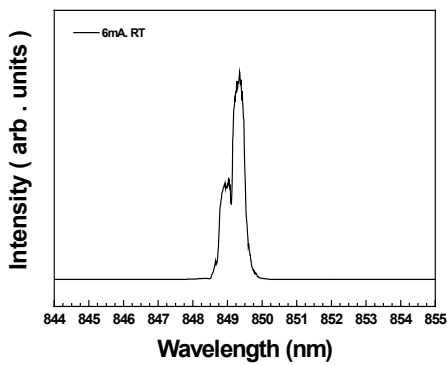

I_{th} vs Temperature

