

Features

- : Multi-mode 850nm VCSEL
- : 2.5Gbps data rates
- : Low drive current and voltage
- : Other configurations available on request

Applications

- : Data Communications
- : Ethernet
- : Fiber Channel

Description




Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to 100 °C
Operating Temperature	0 to 85 °C
Lead Solder Temperature	260 °C, 10 sec
Continuous Forward Current	12mA
Continuous Reverse Voltage	5V (@10µA)

Dimensions

Unit:mm

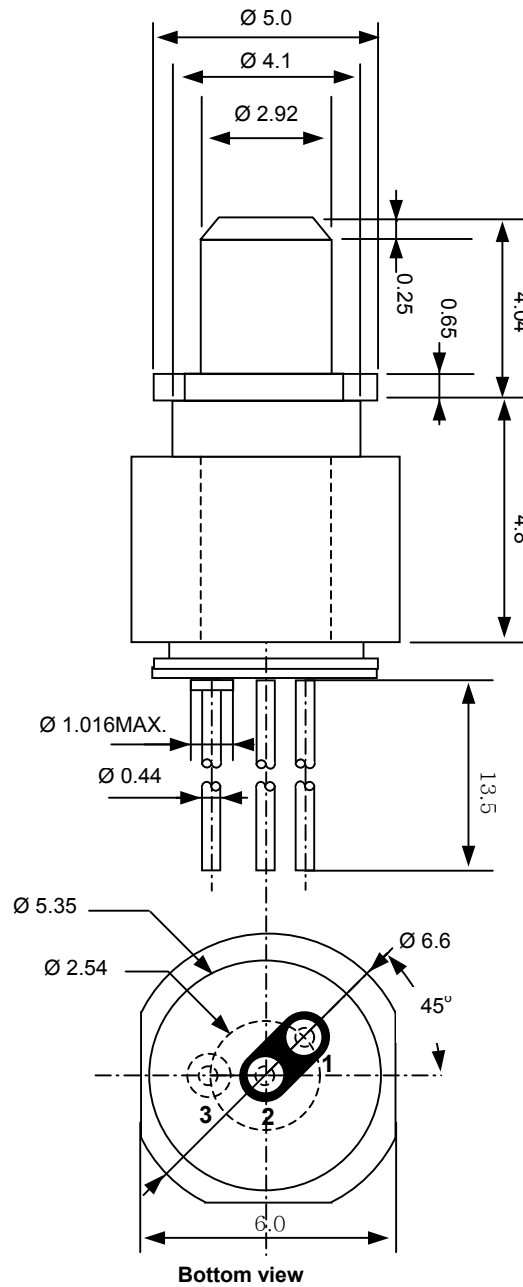

PINOUT



Number	Function
1	A _{LD}
2	K _{LD}
3	NC

Electro-Optics Characteristics (T_a=25°C unless otherwise stated)

Parameters	Symbol	Specified			Unit	Test Conditions
		Min.	Typ.	Max.		
Peak Fiber Coupled Optical Output Power(See threshold current And slope efficiency which Control power output)	P _{oc}		1		mW	I _f = 6 mA, 50/125 μm fiber NA=0.20
Threshold Current	I _{th}		1.5	3	mA	CW
I _{th} Temperature Variation	ΔI _{th}		1.5		mA	T _a =0 to 85 °C
Slope Efficiency	η	0.1	0.2		W/A	I _f = 6mA
η Temperature Variation	Δη / ΔT		-0.5		%/ °C	T _a =0 to 85 °C at 6mA
Peak Wavelength	λ	840	850	860	nm	I _f = 6mA
λ Temperature Variation	Δλ / ΔT		0.06			T _a =0 to 85 °C at 6mA
Spectral Bandwidth (RMS)	Δλ			0.85	nm	I _f = 6mA
Operating Voltage	V _f		1.7	2.2	V	I _f = 6mA
Breakdown Voltage	V _b		-10		V	
Dynamic Resistance	R _d	20	35	55	Ohm	I _f = 6mA

Notes

* These specifications are subject to change without notice



NOTICE

The inherent design of this component causes it to be sensitive to electrostatic discharge(ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

DANGER

The VCSEL is a class IIIb laser and should be treated as a potential eye hazard. Due to the size of the component, the applicable warning logotype, aperture label, and certification / identification label cannot be placed on the component itself.