


Features

- : 850nm wavelength range
- : High data rate 1.25 /2.5Gbps
- : High reliability
- : Low current and voltage
- : Other configurations available on request

Applications

- : High speed Data Communications
- : Gigabit Ethernet
- : Fiber Channel


Description

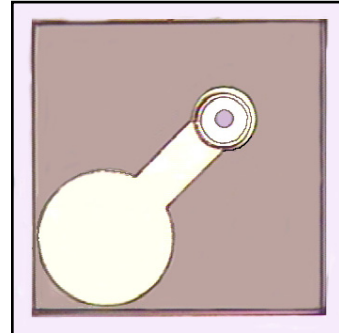

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to 100 °C
Operating Temperature	0 to 85 °C
Lead Solder Temperature	260 °C, 10 sec
Continuous Forward Current	12mA
Continuous Reverse Voltage	5V (@10µA)

Dimensions

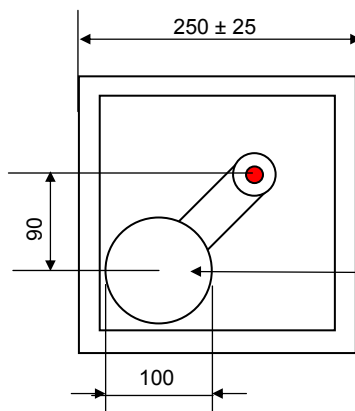

Unit: µm

Die Height: 200±15 µm



Anode Bonding Pad (Φ 100 µm)

Electro-Optics Characteristics (T_a=25°C unless otherwise stated)

Parameters	Symbol	Specified			Unit	Test Conditions
		Min.	Typ.	Max.		
Threshold Current	I _{th}		1.5	3	mA	CW
I _{th} Temperature Variation	ΔI _{th}		1.5		mA	T _a =0 to 85 °C
Slope Efficiency	η	0.2	0.3	0.5	W/A	I _f = 7mA
η Temperature Variation	Δη / ΔT		-0.5		%/ °C	T _a =0 to 85 °C at 7mA
Optical Output Power	P _o		1.8		mW	I _f = 7mA
Peak Wavelength	λ	840	850	860	nm	I _f = 7mA
λ Temperature Variation	Δλ / ΔT		0.06			T _a =0 to 85 °C at 7mA
Spectral Bandwidth (RMS)	Δλ			0.85	nm	I _f = 7mA
Beam Divergence	Θ	14		30	°	P _o =1.8mW, (Full Width, 1/e ²)
Operating Voltage	V _f		1.8	2.2	V	I _f = 7mA
Breakdown Voltage	V _b		-10		V	
Dynamic Resistance	R _d	20	35	55	Ohm	I _f = 7mA
Rise and Fall times	t _r /t _f			110	ps	20% to 80%

Notes

* These specifications are subject to change without notice.



NOTICE

The inherent design of this component causes it to be sensitive to electrostatic discharge(ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

DANGER

The VCSEL is a class IIIb laser and should be treated as a potential eye hazard. Due to the size of the component, the applicable warning logotype, aperture label, and certification / identification label cannot be placed on the component itself.

Characteristics Curves

